




BEARINGS IMPORTED AND EXPORTED CO.,LTD.

15 mm x 28 mm x 7 mm NTN 6902ZZ deep groove ball bearings

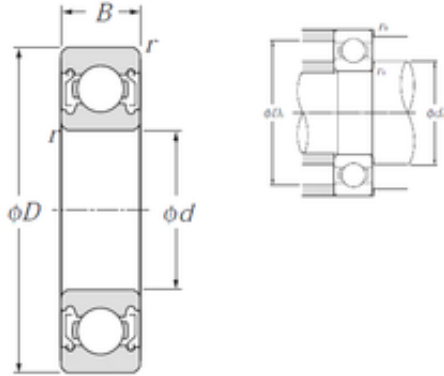

Bearing No. 6902ZZ

6902ZZ Bearing 2D drawings and 3D CAD models

Size	15x28x7 mm
Bore Diameter	15 mm
Outer Diameter	28 mm
Width	7 mm
d	15 mm
D	28 mm
B	7 mm
C	7 mm
rn	0,3 mm
r min.	0,3 mm
da min.	17 mm
da max	17,5 mm
Da max.	26 mm
ra max.	0,3 mm
Weight	0,016 Kg
Basic dynamic load rating (C)	3,65 kN
Basic static load rating (C0)	2 kN
(Grease) Lubrication Speed	24 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.016
EAN	4547359006582
Product Group	B00308



BEARINGS IMPORTED AND EXPORTED CO.,LTD.

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	15MM Bore; 28MM Outside Diameter; 7MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6902ZZ/2AS
Weight / LBS	0.036
Outer Race Width	0.276 Inch 7 Millimeter
Outside Diameter	1.102 Inch 28 Millimeter
Bore	0.591 Inch 15 Millimeter
Other Features	Deep Groove Shell Alvania Prelubricated
Inner Race Width	0 Inch 0 Millimeter
bore diameter:	15 mm
precision rating:	ISO Class 0
outside diameter:	28 mm



BEARINGS IMPORTED AND EXPORTED CO.,LTD.

finish/coating:	Uncoated
overall width:	7 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	7 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	7 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	24000 rpm
internal clearance:	CN
fillet radius:	0.3 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	24000 RPM
dynamic load capacity:	3650 N
series:	69
static load capacity:	2000 N
manufacturer product page:	Click here