




160 mm x 240 mm x 38 mm NTN 6032LLU
deep groove ball bearings

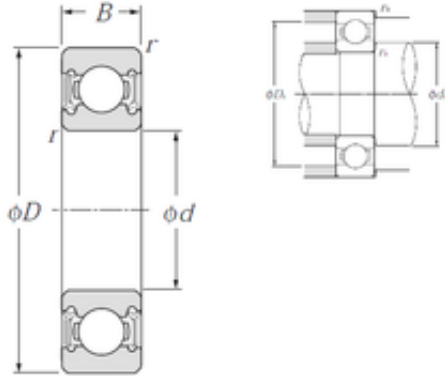

Bearing No. 6032LLU

6032LLU Bearing 2D drawings and 3D CAD models

Size	160x240x38 mm
Bore Diameter	160 mm
Outer Diameter	240 mm
Width	38 mm
d	160 mm
D	240 mm
B	38 mm
C	38 mm
r min.	2,1 mm
da min.	171 mm
da max	183 mm
Da max.	229 mm
ra max.	2 mm
Weight	5,05 Kg
Basic dynamic load rating (C)	143 kN
Basic static load rating (C0)	144 kN
Reference speed	1 600 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	5.04
EAN	4547359551488
Product Group	B00308
Enclosure	2 Seals



BEARINGS IMPORTED AND EXPORTED CO.,LTD.

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C3-Loose
Inch - Metric	Metric
Long Description	160MM Bore; 240MM Outside Diameter; 38MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6032LLU/2A
Weight / LBS	11.1
Outer Race Width	1.496 Inch 38 Millimeter
Bore	6.299 Inch 160 Millimeter
Outside Diameter	9.449 Inch 240 Millimeter
bore diameter:	160 mm
static load capacity:	126000 N
outside diameter:	240 mm
precision rating:	ISO Class 0
overall width:	38 mm
finish/coating:	Uncoated



BEARINGS IMPORTED AND EXPORTED CO.,LTD.

bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	38 mm
snap ring included:	Without Snap Ring
outer ring width:	38 mm
internal clearance:	CN
maximum rpm (grease):	1700 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	2.1 mm
dynamic load capacity:	126000 N
manufacturer product page:	Click here