




30 mm x 47 mm x 9 mm NTN 6906LLB deep groove ball bearings

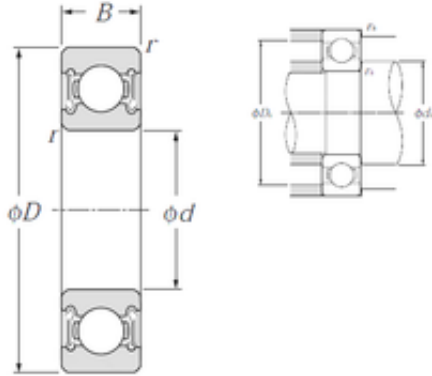

Bearing No. 6906LLB

6906LLB Bearing 2D drawings and 3D CAD models

Size	30x47x9 mm
Bore Diameter	30 mm
Outer Diameter	47 mm
Width	9 mm
d	30 mm
D	47 mm
B	9 mm
C	9 mm
r min.	0,3 mm
da min.	32 mm
da max	34 mm
Da max.	45 mm
ra max.	0,3 mm
Weight	0,048 Kg
Basic dynamic load rating (C)	7,25 kN
Basic static load rating (C0)	5 kN
(Grease) Lubrication Speed	14 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.048
EAN	4547359006728
Product Group	B00308
Enclosure	2 Seals



BEARINGS IMPORTED AND EXPORTED CO.,LTD.

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	30MM Bore; 47MM Outside Diameter; 9MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage; N
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6906LLB
Weight / LBS	0.106
Outer Race Width	0.354 Inch 9 Millimeter
Outside Diameter	1.85 Inch 47 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Bore	1.181 Inch 30 Millimeter
bore diameter:	30 mm
precision rating:	ISO Class 0



BEARINGS IMPORTED AND EXPORTED CO.,LTD.

outside diameter:	47 mm
finish/coating:	Uncoated
overall width:	9 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	9 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	9 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	14000 rpm
internal clearance:	CN
fillet radius:	0.3 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	14000 RPM
dynamic load capacity:	7250 N
series:	69
static load capacity:	5000 N
manufacturer product page:	Click here